


# COLIBRÌ® SYSTEM

With the Colibrì System, Claber brings all of the advantages of underground irrigation into small green spaces too! It is easy to use, saves on water, keeps your lawn and plants looking good and healthy, and makes the most of your garden. Colibrì is easy to install, with no need to dig large holes or connect up to the power mains. All you need is one of Claber's battery-powered timers connected to the tap to make sure your garden has just the right amount of water at the right time, even when you are away or on holiday. And with the new jet adjustment, you just need two fingers for perfect, targeted irrigation with no waste!

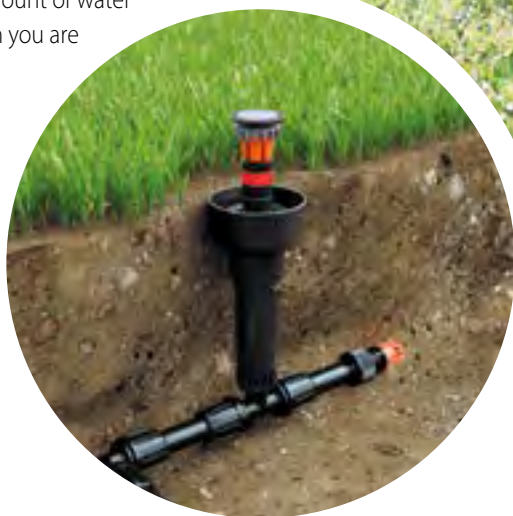

## COLIBRÌ SYSTEM

Underground irrigation  
for small gardens



EXTERNAL JET ADJUSTMENT  
WITH JUST TWO FINGERS

WASHABLE FILTER

STAINLESS STEEL RETURN SPRING

NON-SPILL RUBBER VALVE  
WITH FROST-RESISTANT  
DEVICE

GEAR-DRIVEN TURBINE  
WITH JET-INTERCEPTING HEAD

BODY AND ROD  
IN SHOCKPROOF ABS

INFO



360° COLIBRÌ MICRO-SPRINKLER  
90210



180° COLIBRÌ MICRO-SPRINKLER  
90220



90° COLIBRÌ MICRO-SPRINKLER  
90230



Underground micro-sprinkler with low water consumption. Ideal for watering vegetable patches and small gardens, even at low pressure.  
Gear-driven device made from acetal resin.  
External adjustment of range.

Height from ground: 2" (5 cm).



code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90210		12	4 x 14,3 x 4	23,7 x 16,5 x 17,5	0,007	1,10	1512	8 000625 902101
90220		12	4 x 14,3 x 4	23,7 x 16,5 x 17,5	0,007	1,10	1512	8 000625 902200
90230		12	4 x 14,3 x 4	23,7 x 16,5 x 17,5	0,007	1,10	1512	8 000625 902309

90210

360°			r	
BAR	l/min	m²		
1,5	4,0	38,5	r 3,5 m	5,0 m
2,0	4,5	50,2	r 4,0 m	5,7 m
3,0	5,1	63,6	r 4,5 m	6,4 m

90220

180°			r	
BAR	l/min	m²		
1,5	2,9	25,1	r 4,0 m	5,7 m
2,0	3,3	31,8	r 4,5 m	6,4 m
3,0	3,6	34,7	r 4,7 m	6,7 m

90230

90°			r	
BAR	l/min	m²		
1,5	1,7	9,6	r 3,5 m	5,0 m
2,0	2,0	13,8	r 4,2 m	6,0 m
3,0	2,1	13,8	r 4,2 m	6,0 m


GUARD COLLAR

90250



For optimum installation of Colibrì micro-sprinklers.  
Traps sand and pebbles from the soil.

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90250		10	8 x 6,5 x 3,5	10 x 13 x 39	0,005	0,30	1200	8 000625 902507

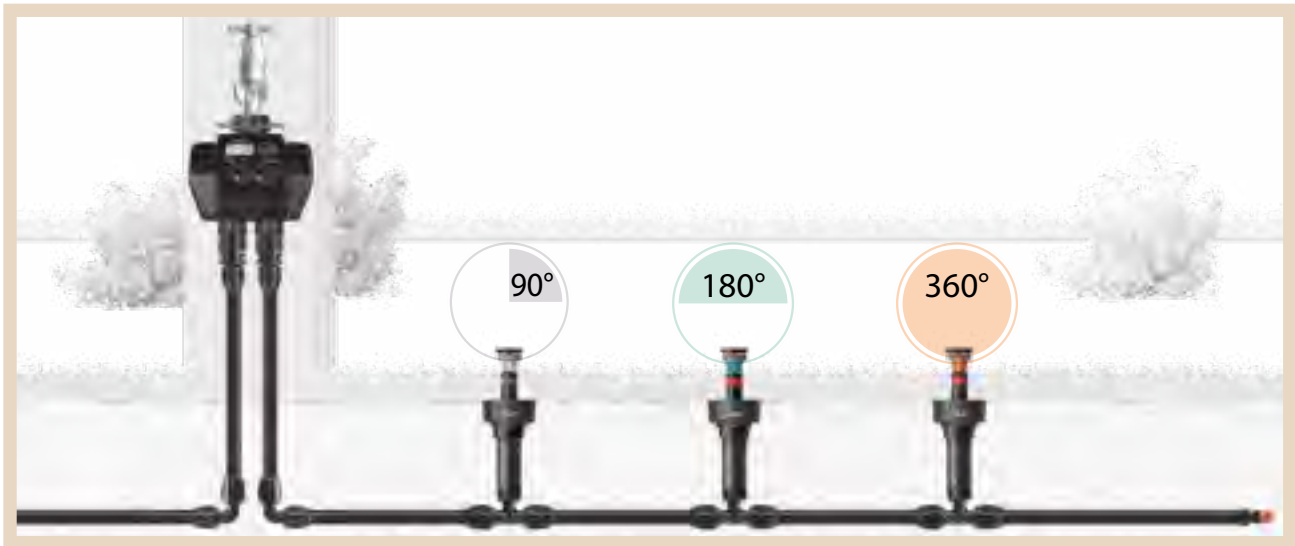

COLIBRÌ STARTER KIT

90200




Starter kit for an underground watering system for 50 m<sup>2</sup> garden, complete with Colibrì System micro-sprinklers. Additional micro-sprinklers and Colibrì System accessories are also available as required (regular shape gardens, max 200 m<sup>2</sup>). The compact colour packaging features easy assembly instructions of all kit components.

CONTAINS

3291	Main tube 25 m	x 1	91072	1/2" (15-21 mm) threaded 3 - way connector	x 3
91347	1/2" hose threaded adaptor	x 1	90920	Threaded drainage valve	x 1
91494	3/4" automatic adaptor	x 1	90210	360° - 2" micro-sprinkler	x 1
91081	1/2" elbow coupling	x 5	90220	180° - 2" micro-sprinkler	x 4
91071	1/2" tee	x 2	91096	Tube clamp	x 24
91082	1/2" (15-21 mm) threaded elbow	x 2	90250	Guard collars	x 5

code	packaging	qty	pack size (cm)	box size (cm)	volume (m³)	weight (kg)	pcs/pallet	
90200		1	40 x 40 x 12	40 x 40 x 12	0,019	2,70	54	

EXAMPLE OF SYSTEM WITH THE COLIBRÌ STARTER KIT

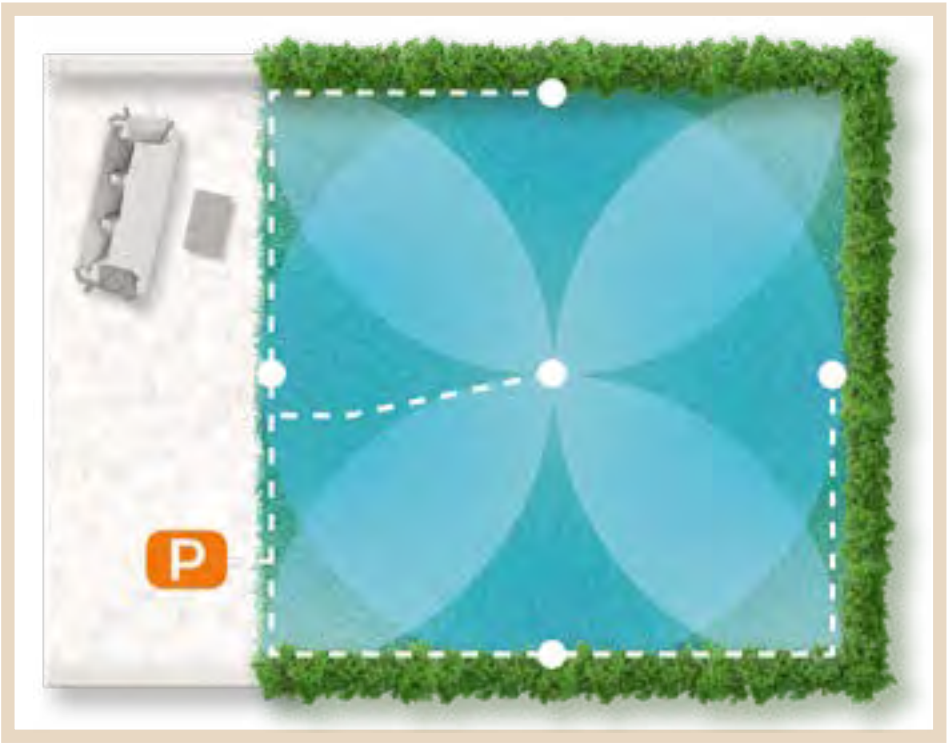

MAIN REQUIREMENTS:

- Pressure: minimum 2.5 bars
- Flow rate: at least 21 l/min
- Garden shape: regular (square or slightly rectangular; e.g. 7 x 7 m, 8 x 7 m, 8 x 8 m)
- Water supply: water mains

FEATURES:

- The kit comes with fixed angle sprinklers (1 x 360°, 4 x 180°)
- Colibrì sprinklers have a jet of min. 3.5 m - max. 4.5 m
- The area behind the sprinklers is also watered for about 25-30 cm.



The underground micro-irrigation system created with the Colibrì Starter Kit can easily be automated by using a Claber one-way tap timer (Aquauno, Aquauno Plus and Tempo, from page 88).

